


Item		UX-B160WG
Nozzle Size		65μ m
Max. print line number		Up to 3 lines
Maximun number of print characters		Up to 240 characters
	5x5	✓
	5x7(8), 9x7(8)	✓
	7x10	✓
	10x12	✓
	12x16	✓
	18x24	✓
character height		2-10mm
Display & input device		WYSIWYG design Input device : Touch panel, input sound provided Display : TFT LCD, Backlight provided.
		10.4" Monochrome
Screen languages		English
Maximun print late (characters per second) (Font 5x5, space 1, 1line)		Up to 1148
Standard characters		Alphanumeric(A-Z, a-z, 0-9) symbols(27) and space : Total 90
User pattern		50patterns each for dot matrix
Print functions		Calendar, Count, Font mixture, Password
Message storage capacity		150
External memory		USB for user data storage
Head cable length/angle		4m(in-line/90 degrees)
Operating temperature range		10-45 degree
Operating humidity range		30-90% RH(no condensation)
Power supply(Automatic voltage selection)		AC 100-120/220-240±10% 50/60Hz 120VA
Dimensions(Width x Depth x Height)		400x320x527mm
international protection		IP55
Approximate weight		27kg
Make up consumption(20 degree)		6.0ml/h
Wiring of power supply		Terminal block



Information in this brochure is subject to change without notice.

Hitachi Industrial Equipment Systems Co.,Ltd.
 For further information, please contact your nearest sales representative.

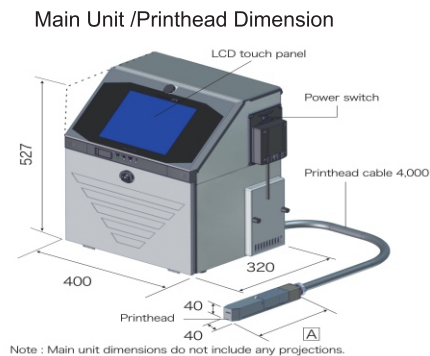

Premium Coding Solutions
 UG-02,Classic Diamond ,WB-94, Sch.No.94,
 Vijay Nagar,Indore (M.P)-452010.
 Email Id - sales@premiumcodingsolutions.in | Website -www.premiumcodingsolutions.com
 Tel: 0731-4978060 | Mob No.9109958391



Registration number: JQA-QMA12087
 Registration date: April 1, 2005
 The Marking Systems and Hoist Systems Division
 (Taga Division) of Hitachi Industrial Equipment
 Systems Co., Ltd. obtained international standard
 ISO 9001 certification for the quality assurance of
 the Ink Jet Printer contained in this brochure.

HITACHI
 Inspire the Next

Ink Jet Printer
UX-B 160WG

